

## General Information

- **Permanent**, washable, tack regenerating mat (patent pending) designed specifically for the removal of even the finest footborne and wheelborne contamination
- Low profile for easy and safe passage of carts and personnel. **Framed for no charge upon request.**
- Multiple applications - inside/outside cleanroom area, air showers, gown rooms, and entry/hall ways.
- **Removes 98% - 100%** of all surface footborne and wheelborne contamination. (Minimum 3 steps)
- Custom cut sizes and installation instructions at **NO CHARGE**. New vinyl weld creates a contamination free seam. Most seaming done at Hartco. Any size or shape available. **We Create the Solution to Your Need !!!**
- **ENVIRONMENTALLY FRIENDLY** - 100% recyclable at **NO CHARGE**; thereby decreasing on site waste. 100% of all materials can be recycled - JUST CALL US for disposal.
- Will self-adhere to any flat, clean surface. When needed, non residue adhesive strips provided at **NO CHARGE**.
- Can be moved to different locations without distortion and tearing.
- **NO** risk of static damage. **NO LAYERS TO PEEL OFF TO CREATE DAMAGING STATIC.**
- Levels of **STATIC** dissipated when walking across mat !! **10<sup>8</sup> SURFACE RESISTANCE.**
- **JUST MOP, RINSE, SQUEEGEE AND LET DRY !!** 100% of the tack is regenerated when cleaned properly and regularly.
- **LONGER LIFE, LESS WASTE, LOWEST COST. - THAN ANY OTHER ALTERNATIVE - PERMANENT OR DISPOSABLE.**

## Product Specifications:

Thickness	Standard of 90 -100 mils
Width*	Standard width up to 4 ft.
Length*	Standard length from 1 ft (.3m) to 50ft (15m)

## Technical Information:

Coefficient of Friction 2.02 (ASTM C1028), 4.05 TORTUS

Load Resistance 1200 PSI .

Heat Resistance 32° F to 123° F; 0° C to 50° C Length\* Standard

Toxicity Non-toxic \*These vary depending on specific customer needs.

X-Rays No Effect


Gamma Rays No Effect

Outgassing Negligible

ESD Features Dissipative (more information available upon request)

Chemical Resistance Resistant to most chemicals (more information available upon request)

Bacteria Resistance Prevents common bacteria (tested on pseudomonas aeruginosa and staphylococcus aureus.)

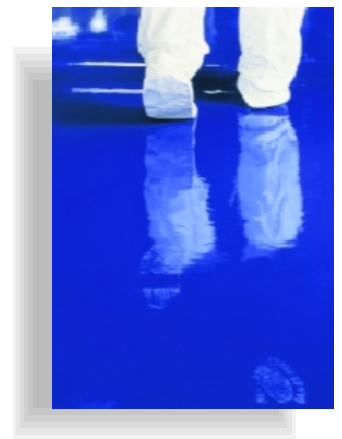

# MICRO-PURE Flooring

## General Information:

- **Permanent**, washable, tack regenerating (patent pending), **WALL-TO-WALL** flooring for **TOTAL AREA** entrapment of even the finest particles of footborne and wheelborne contamination. Fabric backed for increased life.
- Low profile for easy and safe passage of carts and personnel. **Framed for no charge upon request.**
- Multiple applications - inside/outside cleanroom area, air showers, gown rooms, entry/hall ways, and whole rooms.
- **Removes 98% - 100%** of all surface footborne and wheelbourne contamination. (Minimum 3 steps)
- Custom cut sizes and installation instructions at **NO CHARGE**. New vinyl weld creates a **contamination free seam**. Most seaming done at Hartco. Any size or shape available. Permanent adhesive **PRE -APPLIED (upon request)** for **EASY INSTALLATION**. **We Create the Solution to Your Need ! ! !**
- **LOWERS** risk of static damage.
- Levels of **STATIC** dissipated when walking across mat ! ! **10<sup>8</sup> SURFACE RESISTANCE**.
- **JUST MOP, RINSE, SQUEEGEE AND LET DRY ! !** 100% of the tack is regenerated when cleaned properly and regularly.
- **SHOCK ABSORPTION** qualities give employees safer working conditions while reducing employers costs.
- Available in: Blue - Gray - Red - Green. Minimum required.
- **LONGER LIFE, LESS WASTE, LOWEST COST. - THAN ANY OTHER ALTERNATIVE - PERMANENT OR DISPOSABLE.**

## Product Specifications:

Thickness	Standard of 100 mils w/fabric backing
Width*	Standard width up to 4 ft. 6 in.
Length*	Standard length from 1 ft (.3m) to 50ft (15m)

## Technical Information:

Coefficient of Friction 2.02 (ASTM C1028), 4.05 TORTUS

Load Resistance 1200 PSI .

Heat Resistance 32° F to 123° F; 0° C to 50° C Length\* Standard

Toxicity Non-toxic \*These vary depending on specific customer needs.

X-Rays No Effect

Gamma Rays No Effect

Outgassing Negligible

ESD Features Dissipative (more information available upon request)

Chemical Resistance Resistant to most chemicals (more information available upon request)

Bacteria Resistance Prevents common bacteria (tested on pseudomonas aeruginosa and staphylococcus aureus.)

